



ENERG

енергия · ενεργεια


Y IJA
IE IA




Indoor unit EHST17/20D-****D
Outdoor unit SUZ-SHWM60VAH(-SC)



A⁺⁺

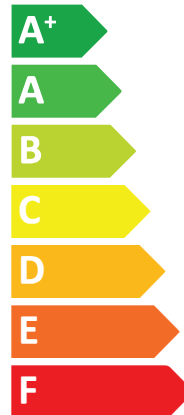

A⁺

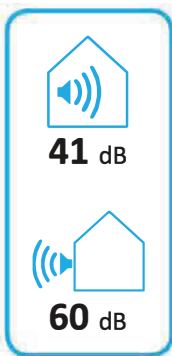

1. SPACE HEATER

Table with 25 columns for performance metrics (1-25) and 10 rows of product models (SUZ-SWM30VA to SUZ-SWM100VAH). Columns 3-12 cover medium-temperature applications, and columns 13-25 cover low-temperature applications. Metrics include energy efficiency, seasonal space heating, and sound power level.

2. COMBINATION HEATER

Large table with 25 columns for performance metrics (1-25) and 10 rows of product models (SUZ-SWM30VA to SUZ-SWM100VAH). Columns 3-12 cover medium-temperature applications, and columns 13-25 cover low-temperature applications. Metrics include energy efficiency, seasonal space heating, and sound power level.

| | English | Deutsch | Français | Italiano | Español |
|----|---|---|---|---|--|
| | Nederlands suomi | Svenska Čeština | Dansk Български | Português Polski | Ελληνικά - |
| 1 | Outdoor unit buiteneunit Ulkoyksikkö | Außengerät Utomhusenhet Venkovní jednotka | unité extérieure Udendørs enhed Външно тяло | unità esterna unidade exterior jednostka zewnętrzna | unidad exterior Εξωτερική μονάδα - |
| 2 | Indoor unit binneneunit Sisäyksikkö | Innengerät Inomhusenhet Vnitřní jednotka | unité intérieure Indendørs enhed Вътрешно тяло | unità interna unidade interior jednostka wewnętrzna | unidad interior Εσωτερική μονάδα - |
| 3 | Medium-temperature application middentemperatuur-toepassing keskilämpötilan sovellus | Mitteltemperaturanwendung mediumtemperatuurapplicatie středněteplotní aplikace | l'application à moyenne température middeltemperatuuravvendelsen среднотемпературното приложение | le applicazioni a media temperatura a aplicação a média temperatura zastosowania w średnich temperaturach | la aplicación de media temperatura η εφαρμογή σε μέση θερμοκρασία - |
| 4 | Low-temperature application lågetemperatuur-toepassing matalanlämpötilan sovellus | Niedertemperaturanwendung lågetemperatuurapplicatie nízkoteplotní aplikace | l'application à basse température lavtemperatuuravvendelsen нискотемпературни приложения | le applicazioni a bassa temperatura a aplicação a baixa temperatura zastosowania w niskich temperaturach | la aplicación de baja temperatura η εφαρμογή σε χαμηλή θερμοκρασία - |
| 5 | Declared load profile Opgegeven capaciteitsprofiel Ilmoitettu kuormitusprofiili | Angegebenes Lastprofil Deklarerad belastningsprofil Deklarovaný zátěžový profil | Profil de soutirage déclaré Angivet forbrugsprofil Объявлен товаро профил | Profilo di carico dichiarato Perfil de carga declarado Deklarowany profil obciążenia | Perfil de carga declarado Δηλωμένο προφίλ φορτίου - |
| 6 | Seasonal space heating energy efficiency class de seizoengebonden energie-efficiëntieklasse voor ruimteverwarming tilalämmityksen kausittainen energiatehokkuusluokka | die Klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz säsongrelaterade energieeffektivitetsklass vid rumsuppvärmning třída sezonní energetické účinnosti vytápění | la classe d'efficacité énergétique saisonnière, pour le chauffage des locaux klassen for årsvirkningsgrad ved rumopvarmning класът на сезонната отоплителна енергийна ефективност | la classe di efficienza energetica stagionale del riscaldamento d'ambiente A classe de eficiência energética do aquecimento ambiente sazonal klasa sezonowej efektywności energetycznej ogrzewania pomieszczeń | la clase de eficiencia energética estacional de calefacción η τάξη ενεργειακής απόδοσης της εποχιακής θέρμανσης χώρου - |
| 7 | Water heating energy efficiency class de energie-efficiëntieklasse voor waterverwarming vedenlämmityksen energiatehokkuusluokka | die Klasse für die Warmwasserbereitungs-Energieeffizienz energieeffektivitetsklass vid vattenuppvärmning třída energetické účinnosti ohřevu vody | la classe d'efficacité énergétique, pour le chauffage de l'eau klassen for årsvirkningsgrad ved vandopvarmning класът на енергийната ефективност при подграване на вода | la classe di efficienza energetica del riscaldamento dell'acqua A classe de eficiência energética do aquecimento de água klasa efektywności energetycznej podgrzewania wody | la clase de eficiencia energética del caldeo de agua η τάξη ενεργειακής απόδοσης θέρμανσης νερού - |
| 8 | Rated heat output under average climate conditions de nominale warmteafgifte(onder gemiddelde klimaatomstandigheden) nimellämpöteho(keskimääräisissä ilmasto-olosuhteissa) | die Wärmenennleistung bei durchschnittlichen Klimaverhältnissen Den nominella avgivna värmeeffekten(under genomsnittliga klimatförhållanden) jmenovitý tepelný výkon(za průměrných klimatických podmínek) | la puissance thermique nominale dans les conditions climatiques moyennes den nominella avgivna värmeeffekten(under genomsnittliga klimaförhållanden) номиналната топлинна мощност(при средни климатични условия) | A potenza termica nominale(in condizioni climatiche medie) A potência calorífica nominal(em condições climáticas médias) znamięniona moc cieplna(w warunkach klimatu umiarkowanego) | la potencia calorífica nominal(en condiciones climáticas medias) η ονομαστική θερμική ισχύς(υπό μέσες κλιματικές συνθήκες) - |
| 9 | For space heating, annual energy consumption under average climate conditions voor ruimteverwarming, het jaarlijkse energieverbruik(onder gemiddelde klimaatomstandigheden) tilalämmityksestä vuotuinen energiankulutus(keskimääräisissä ilmasto-olosuhteissa) | für die Raumheizung, den jährlichen Energieverbrauch bei durchschnittlichen Klimaverhältnissen För rumsuppvärmning, årlig energiförbrukning(vid genomsnittliga klimatförhållanden) pro vytápění – roční spotřeba energie za průměrných klimatických podmínek | pour le chauffage des locaux, la consommation annuelle d'énergie(dans les conditions climatiques moyennes) for rumopvarmning det årlige energiforbrug(under gennemsnitlige klimaförhållanden) за отопление, годишното потребление на енергия(при средни климатични условия) | per il riscaldamento d'ambiente, il consumo annuo di energia(in condizioni climatiche medie) Para o aquecimento ambiente, o consumo anual de energia(em condições climáticas médias) w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii(w warunkach klimatu umiarkowanego) | para calentar espacios, el consumo anual de energía(en condiciones climáticas medias) για τη θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας(υπό μέσες κλιματικές συνθήκες) - |
| 10 | For water heating, annual electricity consumption under average climate conditions voor waterverwarming, het jaarlijkse elektriciteitsverbruik(onder gemiddelde klimaatomstandigheden) vedenlämmityksestä vuotuinen sähkökulutus(keskimääräisissä ilmasto-olosuhteissa) | für die Warmwasserbereitung, den jährlichen Stromverbrauch bei durchschnittlichen Klimaverhältnissen För vattenuppvärmning, årlig elförbrukning(vid genomsnittliga klimatförhållanden) pro ohřev vody – roční spotřeba elektrické energie za průměrných klimatických podmínek | pour le chauffage de l'eau, la consommation annuelle d'électricité(dans les conditions climatiques moyennes) for vandopvarmning det årlige elforbrug(under gennemsnitlige klimaförhållanden) за подграване на вода, годишното потребление(при средни климатични условия) | per il riscaldamento dell'acqua, il consumo annuo di energia(in condizioni climatiche medie) para o aquecimento de água, o consumo anual de electricidade(em condições climáticas médias) w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej(w warunkach klimatu umiarkowanego) | para calentar agua, el consumo anual de electricidad(en condiciones climáticas medias) για την θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας(υπό μέσες κλιματικές συνθήκες) - |
| 11 | Seasonal space heating energy efficiency under average climate conditions de seizoengebonden energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden) tilalämmityksen kausittainen energiatehokkuus(keskimääräisissä ilmasto-olosuhteissa) | die jahreszeitbedingte Raumheizungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen Säsongmedelverkningsgrad för rumsuppvärmning(vid genomsnittliga klimatförhållanden) sezonní energetická účinnost vytápění za průměrných klimatických podmínek | l'efficacité énergétique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes) årsvirkningsgraden ved rumopvarmning(under gennemsnitlige klimaförhållanden) сезонната енергийна ефективност при отопление(при средни климатични условия) | l'efficienza energetica stagionale di riscaldamento d'ambiente(in condizioni climatiche medie) A eficiência energética do aquecimento ambiente sazonal(em condições climáticas médias) sezonowa efektywność energetyczna ogrzewania pomieszczeń(w warunkach klimatu umiarkowanego) | la eficiencia energética estacional de calefacción(en condiciones climáticas medias) η ενεργειακή απόδοση της εποχιακής θέρμανσης χώρου(υπό μέσες κλιματικές συνθήκες) - |
| 12 | Water heating energy efficiency under average climate conditions de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden) vedenlämmityksen energiatehokkuus(keskimääräisissä ilmasto-olosuhteissa) | die Warmwasserbereitungs-Energieeffizienz bei durchschnittlichen Klimaverhältnissen Energieeffektivitet ved vattenuppvärmning(vid genomsnittliga klimatförhållanden) energetická účinnost ohřevu vody za průměrných klimatických podmínek | l'efficacité énergétique pour le chauffage de l'eau(dans les conditions climatiques moyennes) energieeffektiviteten ved vandopvarmning(under gennemsnitlige klimaförhållanden) енергийната ефективност при подграване на вода(при средни климатични условия) | l'efficienza energetica di riscaldamento dell'acqua(in condizioni climatiche medie) a eficiência energética do aquecimento de água(em condições climáticas médias) efektywność energetyczna podgrzewania wody(w warunkach klimatu umiarkowanego) | la eficiencia energética del caldeo de agua(en condiciones climáticas medias) η ενεργειακή απόδοση θέρμανσης νερού(υπό μέσες κλιματικές συνθήκες) - |
| 13 | Sound power level L _{WA} indoor het geluidsvermogensniveau L _{WA} binnen äänitehotaso L _{WA} sisällä | der Schalleistungspegel L _{WA} in Gebäuden Ljudeffektivnivå L _{WA} i inomhus hladina akustického výkonu L _{WA} ve vnitřním prostoru | le niveau de puissance acoustique L _{WA} , à l'intérieur lydeeffektivniveau L _{WA} inde ниводо на звуковата мощност L _{WA} на закрито | il livello di potenza sonora L _{WA} all'interno O nível de potência sonora L _{WA} no interior poziom mocy akustycznej L _{WA} w pomieszczeniu | el nivel de potencia acústica L _{WA} en interiores η στάθμη ηχητικής ισχύος L _{WA} εσωτερικού χώρου - |
| 14 | Work only during off-peak hours werken uitsluitend in de daluren toimimaan ainoastaan kulutushuippujen ulkopuolella | drivas uteslutande under perioder med låg belastning provozu pouze mimo špičku | fonctionner qu'en heures creuses fungere uden for spidsbelastningsperioder работи само в часовете извън върховото натоварване | de fonctionner uniquement lors des heures de pointe pracować jedynie w godzinach poza szczytowym obciążeniem | funcionar solamente durante las horas de baja demanda λειτουργία μόνο εκτός των ωρών αιχμής - |
| 15 | Rated heat output under colder climate conditions de nominale warmteafgifte, onder koudere klimaatomstandigheden nimellämpöteho, kylmissä ilmasto-olosuhteissa | die Wärmenennleistung bei kälteren Klimaverhältnissen Nominell avgiven värmeeffekt vid kallare klimatförhållanden jmenovitý tepelný výkon za chladnějších klimatických podmínek | la puissance thermique nominale, dans les conditions climatiques plus froides den nominelle nytteeffekt under koldere klimaförhållanden номиналната топлинна мощност при по-студени климатични условия | A potenza termica nominale, in condizioni climatiche più fredde A potência calorífica nominal em condições climáticas mais frias znamięniona moc cieplna w warunkach klimatu chłodnego | la potencia calorífica nominal en condiciones climáticas más frías η ονομαστική θερμική ισχύς υπό ψυχρότερες κλιματικές συνθήκες - |
| 16 | Rated heat output under warmer climate conditions de nominale warmteafgifte, onder warmere klimaatomstandigheden nimellämpöteho, lämpimissä ilmasto-olosuhteissa | die Wärmenennleistung bei wärmeren Klimaverhältnissen Nominell avgiven värmeeffekt vid varmare klimatförhållanden jmenovitý tepelný výkon za teplejších klimatických podmínek | la puissance thermique nominale, dans les conditions climatiques plus chaudes den nominelle nytteeffekt under varmere klimaförhållanden номиналната топлинна мощност при по-топли климатични условия | A potenza termica nominale, in condizioni climatiche più calde A potência calorífica nominal em condições climáticas mais quentes znamięniona moc cieplna w warunkach klimatu ciepłego | la potencia calorífica nominal en condiciones climáticas más cálidas η ονομαστική θερμική ισχύς υπό θερμότερες κλιματικές συνθήκες - |
| 17 | For space heating, annual energy consumption under colder climate conditions voor ruimteverwarming, het jaarlijkse energieverbruik onder koudere klimaatomstandigheden tilalämmityksestä vuotuinen energiankulutus kylmissä ilmasto-olosuhteissa | für die Raumheizung, der jährliche Energieverbrauch bei kälteren Klimaverhältnissen För rumsuppvärmning, årlig energiförbrukning under kallare klimatförhållanden pro vytápění – roční spotřeba energie za chladnějších klimatických podmínek | pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus froides for rumopvarmning det årlige energiforbrug under koldere klimaförhållanden за отопление, годишното потребление на енергия при по-студени климатични условия | per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più fredde Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais frias w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu chłodnego | para calentar espacios, el consumo anual de energía en condiciones climáticas más frías για θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό ψυχρότερες κλιματικές συνθήκες - |
| 18 | For space heating, annual energy consumption under warmer climate conditions voor ruimteverwarming, het jaarlijkse energieverbruik onder warmere klimaatomstandigheden tilalämmityksestä vuotuinen energiankulutus lämpimissä ilmasto-olosuhteissa | für die Raumheizung, der jährliche Energieverbrauch bei wärmeren Klimaverhältnissen För rumsuppvärmning, årlig energiförbrukning under varmare klimatförhållanden pro vytápění – roční spotřeba energie za teplejších klimatických podmínek | pour le chauffage des locaux, la consommation annuelle d'énergie, dans les conditions climatiques plus chaudes for rumopvarmning det årlige energiforbrug under varmere klimaförhållanden за отопление, годишното потребление на енергия при по-топли климатични условия | per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più calde Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais quentes w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii w warunkach klimatu ciepłego | para calentar espacios, el consumo anual de energía en condiciones climáticas más cálidas για θέρμανση χώρου, η ετήσια κατανάλωση ενέργειας υπό θερμότερες κλιματικές συνθήκες - |
| 19 | For water heating, annual energy consumption under colder climate conditions voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden vedenlämmityksestä vuotuinen sähkökulutus kylmissä ilmasto-olosuhteissa | für die Warmwasserbereitung, der jährliche Stromverbrauch bei kälteren Klimaverhältnissen För vattenuppvärmning, årlig elförbrukning under kallare klimatförhållanden pro ohřev vody – roční spotřeba elektrické energie za chladnějších klimatických podmínek | pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides for vandopvarmning det årlige elforbrug under koldere klimaförhållanden за подграване на вода, годишното потребление на електроенергия при по-студени климатични условия | per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più fredde para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais frias w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej w warunkach klimatu chłodnego | para calentar agua, el consumo anual de electricidad en condiciones climáticas más frías για θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό ψυχρότερες κλιματικές συνθήκες - |
| 20 | For water heating, annual energy consumption under warmer climate conditions voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden vedenlämmityksestä vuotuinen sähkökulutus lämpimissä ilmasto-olosuhteissa | für die Warmwasserbereitung, der jährliche Stromverbrauch bei wärmeren Klimaverhältnissen För vattenuppvärmning, årlig elförbrukning under varmare klimatförhållanden pro ohřev vody – roční spotřeba elektrické energie za teplejších klimatických podmínek | pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus chaudes for vandopvarmning det årlige elforbrug under varmere klimaförhållanden за подграване на вода, годишното потребление на електроенергия при по-топли климатични условия | per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più calde para o aquecimento de água, o consumo anual de electricidade em condições climáticas mais quentes w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej w warunkach klimatu ciepłego | para calentar agua, el consumo anual de electricidad en condiciones climáticas más cálidas για θέρμανση νερού, η ετήσια κατανάλωση ηλεκτρικής ενέργειας υπό θερμότερες κλιματικές συνθήκες - |
| 21 | Seasonal space heating energy efficiency under colder climate conditions de seizoengebonden energie-efficiëntie voor ruimteverwarming onder koudere klimaatomstandigheden tilalämmityksen kausittainen energiatehokkuus kylmissä ilmasto-olosuhteissa | die jahreszeitbedingte Raumheizungs-Energieeffizienz bei kälteren Klimaverhältnissen Säsongmedelverkningsgrad för rumsuppvärmning under kallare klimatförhållanden sezonní energetická účinnost vytápění za chladnějších klimatických podmínek | l'efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus froides årsvirkningsgraden ved rumopvarmning under koldere klimaförhållanden сезонната енергийна ефективност при отопление при по-студени климатични условия | l'efficienza energetica stagionale di riscaldamento d'ambiente in condizioni climatiche più fredde A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais frias sezonowa efektywność energetyczna ogrzewania pomieszczeń w warunkach klimatu chłodnego | la eficiencia energética estacional de calefacción en condiciones climáticas más frías η ενεργειακή απόδοση της εποχιακής θέρμανσης χώρου υπό ψυχρότερες κλιματικές συνθήκες - |
| 22 | Seasonal space heating energy efficiency under warmer climate conditions de seizoengebonden energie-efficiëntie voor ruimteverwarming onder warmere klimaatomstandigheden tilalämmityksen kausittainen energiatehokkuus lämpimissä ilmasto-olosuhteissa | die jahreszeitbedingte Raumheizungs-Energieeffizienz bei wärmeren Klimaverhältnissen Säsongmedelverkningsgrad för rumsuppvärmning under varmare klimatförhållanden sezonní energetická účinnost vytápění za teplejších klimatických podmínek | l'efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus chaudes årsvirkningsgraden ved rumopvarmning under varmere klimaförhållanden сезонната енергийна ефективност при отопление при по-топли климатични условия | l'efficienza energetica stagionale di riscaldamento d'ambiente in condizioni climatiche più calde A eficiência energética do aquecimento ambiente sazonal em condições climáticas mais quentes sezonowa efektywność energetyczna ogrzewania pomieszczeń w warunkach klimatu ciepłego | la eficiencia energética estacional de calefacción en condiciones climáticas más cálidas η ενεργειακή απόδοση της εποχιακής θέρμανσης χώρου υπό θερμότερες κλιματικές συνθήκες - |
| 23 | Water heating energy efficiency under colder climate conditions de energie-efficiëntie voor waterverwarming onder koudere klimaatomstandigheden vedenlämmityksen energiatehokkuus kylmissä ilmasto-olosuhteissa | die Warmwasserbereitungs-Energieeffizienz bei kälteren Klimaverhältnissen Energieeffektivitet ved vattenuppvärmning under kallare klimatförhållanden energetická účinnost ohřevu vody za chladnějších klimatických podmínek | l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus froides energieeffektiviteten ved vandopvarmning under koldere klimaförhållanden енергийната ефективност при подграване на вода при по-студени климатични условия | l'efficienza energetica di riscaldamento dell'acqua in condizioni climatiche più fredde a eficiência energética do aquecimento de água em condições climáticas mais frias efektywność energetyczna podgrzewania wody w warunkach klimatu chłodnego | la eficiencia energética de caldeo de agua en condiciones climáticas más frías η ενεργειακή απόδοση της θέρμανσης νερού υπό ψυχρότερες κλιματικές συνθήκες - |
| 24 | Water heating energy efficiency under warmer climate conditions de energie-efficiëntie voor waterverwarming onder warmere klimaatomstandigheden vedenlämmityksen energiatehokkuus lämpimissä ilmasto-olosuhteissa | die Warmwasserbereitungs-Energieeffizienz bei wärmeren Klimaverhältnissen Energieeffektivitet ved vattenuppvärmning under varmare klimatförhållanden energetická účinnost ohřevu vody za teplejších klimatických podmínek | l'efficacité énergétique pour le chauffage de l'eau, dans les conditions climatiques plus chaudes energieeffektiviteten ved vandopvarmning under varmere klimaförhållanden енергийната ефективност при подграване на вода при по-топли климатични условия | l'efficienza energetica di riscaldamento dell'acqua in condizioni climatiche più calde a eficiência energética do aquecimento de água em condições climáticas mais quentes efektywność energetyczna podgrzewania wody w warunkach klimatu ciepłego | la eficiencia energética de caldeo de agua en condiciones climáticas más cálidas η ενεργειακή απόδοση της θέρμανσης νερού υπό θερμότερες κλιματικές συνθήκες - |
| 25 | Sound power level L _{WA} outdoor het geluidsvermogensniveau L _{WA} buiten äänitehotaso L _{WA} ulkona | der Schalleistungspegel L _{WA} im Freien Ljudeffektivnivå L _{WA} i utomhus hladina akustického výkonu L _{WA} ve venkovním prostoru | le niveau de puissance acoustique L _{WA} à l'extérieur lydeeffektivniveau L _{WA} i ude ниводо на звуковата мощност L _{WA} на открито | il livello di potenza sonora L _{WA} all'esterno O nível de potência sonora L _{WA} no exterior poziom mocy akustycznej L _{WA} na zewnątrz | el nivel de potencia acústica L _{WA} en exteriores η στάθμη ηχητικής ισχύος L _{WA} εξωτερικού χώρου - |

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|---------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-****D |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | yes |
| Heat pump combination heater: | | yes |
| Parameters for | | medium-temperature application. |
| Parameters for | | average climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|------------------|-------|------|--|------------|-------|-------------------|
| Rated heat output (*) | Prated | 6.0 | kW | Seasonal space heating energy efficiency | η_s | 126 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | 5.3 | kW | Tj = - 7 °C | COPd | 1.85 | - |
| Degradation co-efficient (**) | Cdh | 1.00 | - | Tj = + 2 °C | COPd | 3.13 | - |
| Tj = + 2 °C | Pdh | 3.7 | kW | Tj = + 7 °C | COPd | 4.66 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = +12 °C | COPd | 6.53 | - |
| Tj = + 7 °C | Pdh | 3.1 | kW | Tj = bivalent temperature | COPd | 1.85 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = operation limit temperature (***) | COPd | 1.64 | - |
| Tj = +12 °C | Pdh | 3.9 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = bivalent temperature | Pdh | 5.3 | kW | Supplementary heater | | | |
| Tj = operation limit temperature (***) | Pdh | 5.8 | kW | Rated heat output (*) | Psup | 0.2 | kW |
| Bivalent temperature | Tbiv | -7 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | -10 | °C | Other items | | | |
| Power consumption in modes other than active mode | | | | Rated air flow rate, outdoors | | | |
| Off mode | P _{OFF} | 0.015 | kW | | | 2500 | m ³ /h |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Capacity control | | | |
| Standby mode | P _{SB} | 0.015 | kW | variable | | | |
| Crankcase heater mode | P _{CK} | 0.000 | kW | Sound power level, indoors/outdoors | | | |
| | | | | L _{WA} | | | |
| | | | | 41 / 60 | | | |
| | | | | Annual energy consumption | | | |
| | | | | Q _{HE} | | | |
| | | | | 3850 | | | |
| | | | | kWh | | | |

| | | | | | | | |
|-----------------------------------|-------|-------|-----|---------------------------------|-------------|-----|---|
| For heat pump combination heater: | | | | | | | |
| Declared load profile | L | | | Water heating energy efficiency | η_{wh} | 152 | % |
| Daily electricity consumption | Qelec | 3.210 | kWh | | | | |
| Annual electricity consumption | AEC | 707 | kWh | | | | |

Contact details
 MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier:



Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND

- Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
- Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
- (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
- (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
- (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|------------------------------|--------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-****D |
| Air-to-water heat pump: | yes | |
| Water-to-water heat pump: | no | |
| Brine-to-water heat pump: | no | |
| Low-temperature heat pump: | no | |
| Equipped with a supplementary heater: | yes | |
| Heat pump combination heater: | yes | |
| Parameters for | low-temperature application. | |
| Parameters for | average climate conditions. | |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|----------------------|-------|------|--|------------------|-------|------|
| Rated heat output (*) | Prated | 6.1 | kW | Seasonal space heating energy efficiency | η_s | 175 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j | | | |
| T _j = - 7 °C | P _{dh} | 5.4 | kW | T _j = - 7 °C | COP _d | 2.78 | - |
| Degradation co-efficient (**) | C _{dh} | 0.99 | - | T _j = + 2 °C | COP _d | 4.43 | - |
| T _j = + 2 °C | P _{dh} | 4.1 | kW | T _j = + 7 °C | COP _d | 6.27 | - |
| Degradation co-efficient (**) | C _{dh} | 0.98 | - | T _j = +12 °C | COP _d | 7.11 | - |
| T _j = + 7 °C | P _{dh} | 3.4 | kW | T _j = bivalent temperature | COP _d | 2.26 | - |
| Degradation co-efficient (**) | C _{dh} | 0.97 | - | T _j = operation limit temperature (***) | COP _d | 2.26 | - |
| T _j = +12 °C | P _{dh} | 3.7 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | C _{dh} | 0.97 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| T _j = bivalent temperature | P _{dh} | 6.1 | kW | Supplementary heater | | | |
| T _j = operation limit temperature (***) | P _{dh} | 6.1 | kW | Rated heat output (*) | P _{sup} | 0.0 | kW |
| Bivalent temperature | T _{biv} | -10 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | T _{designh} | -10 | °C | Power consumption in modes other than active mode | | | |
| Power consumption in modes other than active mode | | | | Off mode | | | |
| Off mode | P _{OFF} | 0.015 | kW | Thermostat-off mode | P _{TO} | 0.015 | kW |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Standby mode | P _{SB} | 0.015 | kW |
| Standby mode | P _{SB} | 0.015 | kW | Crankcase heater mode | P _{CK} | 0.000 | kW |
| Crankcase heater mode | P _{CK} | 0.000 | kW | Other items | | | |
| Capacity control | | | | Rated air flow rate, outdoors | | | |
| variable | | | | - | | | |
| Sound power level, indoors/outdoors | | | | 2500 | | | |
| L _{WA} | | | | m ³ /h | | | |
| 41 / 60 | | | | | | | |
| Annual energy consumption | | | | | | | |
| Q _{HE} | | | | | | | |
| 2838 | | | | | | | |
| kWh | | | | | | | |

| | | | | | | | |
|-----------------------------------|-------------------|-------|-----|---------------------------------|-------------|-----|---|
| For heat pump combination heater: | | | | | | | |
| Declared load profile | L | | | Water heating energy efficiency | η_{wh} | 152 | % |
| Daily electricity consumption | Q _{elec} | 3.210 | kWh | | | | |
| Annual electricity consumption | AEC | 707 | kWh | | | | |

| | | | | | | | |
|--|--|--|--|---|--|--|--|
| Contact details | | | | | | | |
| MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. | | | | 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand | | | |
| The identification and signature of the person empowered to bind the supplier; | | | | | | | |
| | | | | Tadashi SAITO | | | |
| The signature is signed in the average climate / medium-temperature section. | | | | Manager, Quality Assurance Department | | | |
| | | | | THAILAND | | | |

- Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 - Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
- (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P_{designh}, and the rated heat output of a supplementary heater P_{sup} is equal to the supplementary capacity for heating sup(T_j).
- (**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.
- (***) If the declared TOL is lower than the T_{designh} of the considered climate then the outdoor dry bulb temperature T_j is equal to T_{designh}.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|---------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-****D |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | yes |
| Heat pump combination heater: | | yes |
| Parameters for | | medium-temperature application. |
| Parameters for | | colder climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|-------------------|---------|-------|--|------------------|-------|-------------------|
| Rated heat output (*) | Prated | 5.5 | kW | Seasonal space heating energy efficiency | η_s | 100 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | 3.4 | kW | Tj = - 7 °C | COPd | 2.17 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = + 2 °C | COPd | 3.31 | - |
| Tj = + 2 °C | Pdh | 3.4 | kW | Tj = + 7 °C | COPd | 5.15 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = +12 °C | COPd | 6.27 | - |
| Tj = + 7 °C | Pdh | 3.3 | kW | Tj = bivalent temperature | COPd | 1.15 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = operation limit temperature (***) | COPd | 1.08 | - |
| Tj = +12 °C | Pdh | 3.6 | kW | Tj = - 15 °C (if TOL < - 20 °C) | COPd | 1.15 | - |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Operation limit temperature | TOL | -25 | °C |
| Tj = bivalent temperature | Pdh | 4.5 | kW | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = operation limit temperature (***) | Pdh | 4.0 | kW | | | | |
| Tj = - 15 °C (if TOL < - 20 °C) | Pdh | 4.5 | kW | | | | |
| Bivalent temperature | Tbiv | -15 | °C | | | | |
| Reference design conditions for space heating | Tdesignh | -22 | °C | | | | |
| Power consumption in modes other than active mode | | | | Supplementary heater | | | |
| Off mode | P _{OFF} | 0.015 | kW | Rated heat output (*) | P _{sup} | 5.5 | kW |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Type of energy input | Electrical | | |
| Standby mode | P _{SB} | 0.015 | kW | | | | |
| Crankcase heater mode | P _{CK} | 0.000 | kW | | | | |
| Other items | | | | Rated air flow rate, outdoors | | | |
| Capacity control | variable | | | | | 2500 | m ³ /h |
| Sound power level, indoors/outdoors | L _{WA} | 41 / 60 | dB(A) | | | | |
| Annual energy consumption | Q _{HE} | 5265 | kWh | | | | |
| For heat pump combination heater: | | | | Water heating energy efficiency | | | |
| Declared load profile | L | | | | η_{wh} | 132 | % |
| Daily electricity consumption | Q _{elec} | 3.690 | kWh | | | | |
| Annual electricity consumption | AEC | 811 | kWh | | | | |

| | | | | | | | |
|--|--|--|--|---|--|--|--|
| Contact details | | | | | | | |
| MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. | | | | 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand | | | |
| The identification and signature of the person empowered to bind the supplier; | | | | | | | |
| The signature is signed in the average climate / medium-temperature section. | | | | Tadashi SAITO Manager, Quality Assurance Department THAILAND | | | |

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-****D |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | yes |
| Heat pump combination heater: | | yes |
| Parameters for | | low-temperature application. |
| Parameters for | | colder climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|-------------------|---------|-------|--|------------|-------------------|------|
| Rated heat output (*) | Prated | 5.5 | kW | Seasonal space heating energy efficiency | η_s | 147 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | 3.4 | kW | Tj = - 7 °C | COPd | 3.31 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = + 2 °C | COPd | 4.56 | - |
| Tj = + 2 °C | Pdh | 3.6 | kW | Tj = + 7 °C | COPd | 6.55 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = +12 °C | COPd | 7.33 | - |
| Tj = + 7 °C | Pdh | 3.4 | kW | Tj = bivalent temperature | COPd | 1.92 | - |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Tj = operation limit temperature (***) | COPd | 1.71 | - |
| Tj = +12 °C | Pdh | 3.7 | kW | Tj = - 15 °C (if TOL < - 20 °C) | COPd | 1.92 | - |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Operation limit temperature | TOL | -25 | °C |
| Tj = bivalent temperature | Pdh | 4.5 | kW | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = operation limit temperature (***) | Pdh | 5.5 | kW | Supplementary heater | | | |
| Tj = - 15 °C (if TOL < - 20 °C) | Pdh | 4.5 | kW | Rated heat output (*) | Psup | 0.0 | kW |
| Bivalent temperature | Tbiv | -15 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | -22 | °C | Power consumption in modes other than active mode | | | |
| Off mode | | | | P _{OFF} | | | |
| Thermostat-off mode | | | | P _{TO} | | | |
| Standby mode | | | | P _{SB} | | | |
| Crankcase heater mode | | | | P _{CK} | | | |
| Other items | | | | Rated air flow rate, outdoors | | | |
| Capacity control | variable | | | - | 2500 | m ³ /h | |
| Sound power level, indoors/outdoors | L _{WA} | 41 / 60 | dB(A) | | | | |
| Annual energy consumption | Q _{HE} | 3616 | kWh | | | | |
| For heat pump combination heater: | | | | Water heating energy efficiency | | | |
| Declared load profile | L | | | η_{wh} | 132 | % | |
| Daily electricity consumption | Q _{elec} | 3.690 | kWh | | | | |
| Annual electricity consumption | AEC | 811 | kWh | | | | |

| | | | | | | | |
|--|--|--|--|---|--|--|--|
| Contact details | | | | | | | |
| MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. | | | | 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand | | | |
| The identification and signature of the person empowered to bind the supplier; | | | | | | | |
| The signature is signed in the average climate / medium-temperature section. | | | | Tadashi SAITO Manager, Quality Assurance Department THAILAND | | | |

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|---------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-****D |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | yes |
| Heat pump combination heater: | | yes |
| Parameters for | | medium-temperature application. |
| Parameters for | | warmer climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|------------------|-------|------|--|-----------------|-------|------|
| Rated heat output (*) | Prated | 6.0 | kW | Seasonal space heating energy efficiency | η_s | 167 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | - | kW | Tj = - 7 °C | COPd | - | - |
| Degradation co-efficient (**) | Cdh | - | - | Tj = + 2 °C | COPd | 2.47 | - |
| Tj = + 2 °C | Pdh | 6.0 | kW | Tj = + 7 °C | COPd | 3.95 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = +12 °C | COPd | 5.50 | - |
| Tj = + 7 °C | Pdh | 3.9 | kW | Tj = bivalent temperature | COPd | 2.51 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = operation limit temperature (***) | COPd | 2.51 | - |
| Tj = +12 °C | Pdh | 3.6 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = bivalent temperature | Pdh | 6.0 | kW | Supplementary heater | | | |
| Tj = operation limit temperature (***) | Pdh | 6.0 | kW | Rated heat output (*) | Psup | 0.0 | kW |
| Bivalent temperature | Tbiv | 2 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | 2 | °C | Power consumption in modes other than active mode | | | |
| Power consumption in modes other than active mode | | | | Off mode | | | |
| Off mode | P _{OFF} | 0.015 | kW | Thermostat-off mode | P _{TO} | 0.015 | kW |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Standby mode | P _{SB} | 0.015 | kW |
| Standby mode | P _{SB} | 0.015 | kW | Crankcase heater mode | P _{CK} | 0.000 | kW |
| Crankcase heater mode | P _{CK} | 0.000 | kW | Other items | | | |
| Capacity control | | | | Rated air flow rate, outdoors | | | |
| variable | | | | - | | | |
| Sound power level, indoors/outdoors | | | | 2500 | | | |
| L _{WA} | | | | m ³ /h | | | |
| 41 / 60 | | | | | | | |
| Annual energy consumption | | | | | | | |
| Q _{HE} | | | | | | | |
| 1884 | | | | | | | |
| kWh | | | | | | | |
| For heat pump combination heater: | | | | Declared load profile | | | |
| L | | | | Water heating energy efficiency | | | |
| | | | | η_{wh} | | | |
| Daily electricity consumption | | | | 159 | | | |
| Q _{elec} | | | | % | | | |
| 3.070 | | | | | | | |
| Annual electricity consumption | | | | | | | |
| AEC | | | | | | | |
| 676 | | | | | | | |
| kWh | | | | | | | |

| | | | | | | | |
|--|--|--|--|---|--|--|--|
| Contact details | | | | | | | |
| MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. | | | | 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand | | | |
| The identification and signature of the person empowered to bind the supplier; | | | | | | | |
| The signature is signed in the average climate / medium-temperature section. | | | | Tadashi SAITO | | | |
| | | | | Manager, Quality Assurance Department | | | |
| | | | | THAILAND | | | |

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-****D |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | yes |
| Heat pump combination heater: | | yes |
| Parameters for | | low-temperature application. |
| Parameters for | | warmer climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|------------------|-------|------|--|-----------------|-------|------|
| Rated heat output (*) | Prated | 6.0 | kW | Seasonal space heating energy efficiency | η_s | 230 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | - | kW | Tj = - 7 °C | COPd | - | - |
| Degradation co-efficient (**) | Cdh | - | - | Tj = + 2 °C | COPd | 3.67 | - |
| Tj = + 2 °C | Pdh | 6.0 | kW | Tj = + 7 °C | COPd | 5.92 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = +12 °C | COPd | 7.10 | - |
| Tj = + 7 °C | Pdh | 3.9 | kW | Tj = bivalent temperature | COPd | 3.67 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = operation limit temperature (***) | COPd | 3.67 | - |
| Tj = +12 °C | Pdh | 3.7 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = bivalent temperature | Pdh | 6.0 | kW | Supplementary heater | | | |
| Tj = operation limit temperature (***) | Pdh | 6.0 | kW | Rated heat output (*) | Psup | 0.0 | kW |
| Bivalent temperature | Tbiv | 2 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | 2 | °C | Power consumption in modes other than active mode | | | |
| Power consumption in modes other than active mode | | | | Off mode | | | |
| Off mode | P _{OFF} | 0.015 | kW | Thermostat-off mode | P _{TO} | 0.015 | kW |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Standby mode | P _{SB} | 0.015 | kW |
| Standby mode | P _{SB} | 0.015 | kW | Crankcase heater mode | P _{CK} | 0.000 | kW |
| Crankcase heater mode | P _{CK} | 0.000 | kW | Other items | | | |
| Capacity control | | | | Rated air flow rate, outdoors | | | |
| variable | | | | - | | | |
| Sound power level, indoors/outdoors | | | | 2500 | | | |
| L _{WA} | | | | m ³ /h | | | |
| 41 / 60 | | | | | | | |
| Annual energy consumption | | | | | | | |
| Q _{HE} | | | | | | | |
| 1378 | | | | | | | |
| kWh | | | | | | | |
| For heat pump combination heater: | | | | Declared load profile | | | |
| L | | | | Water heating energy efficiency | | | |
| Daily electricity consumption | | | | η_{wh} | | | |
| Q _{elec} | | | | 159 | | | |
| 3.070 | | | | % | | | |
| Annual electricity consumption | | | | | | | |
| AEC | | | | | | | |
| 676 | | | | | | | |
| kWh | | | | | | | |

| | | | | | | | |
|--|--|--|--|---|--|--|--|
| Contact details | | | | | | | |
| MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. | | | | 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand | | | |
| The identification and signature of the person empowered to bind the supplier; | | | | | | | |
| The signature is signed in the average climate / medium-temperature section. | | | | Tadashi SAITO Manager, Quality Assurance Department THAILAND | | | |

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|---------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST17D-****D |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | yes |
| Heat pump combination heater: | | yes |
| Parameters for | | medium-temperature application. |
| Parameters for | | average climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|----------|-------|------|--|------------|-------|------|
| Rated heat output (*) | Prated | 6.0 | kW | Seasonal space heating energy efficiency | η_s | 126 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = -7 °C | Pdh | 5.3 | kW | Tj = -7 °C | COPd | 1.85 | - |
| Degradation co-efficient (**) | Cdh | 1.00 | - | Tj = +2 °C | COPd | 3.13 | - |
| Tj = +2 °C | Pdh | 3.7 | kW | Tj = +7 °C | COPd | 4.66 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = +12 °C | COPd | 6.53 | - |
| Tj = +7 °C | Pdh | 3.1 | kW | Tj = bivalent temperature | COPd | 1.85 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = operation limit temperature (***) | COPd | 1.64 | - |
| Tj = +12 °C | Pdh | 3.9 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = bivalent temperature | Pdh | 5.3 | kW | Supplementary heater | | | |
| Tj = operation limit temperature (***) | Pdh | 5.8 | kW | Rated heat output (*) | Psup | 0.2 | kW |
| Bivalent temperature | Tbiv | -7 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | -10 | °C | Power consumption in modes other than active mode | | | |
| Off mode | | | | P _{OFF} | | | |
| Thermostat-off mode | | | | P _{TO} | | | |
| Standby mode | | | | P _{SB} | | | |
| Crankcase heater mode | | | | P _{CK} | | | |
| Capacity control | | | | variable | | | |
| Sound power level, indoors/outdoors | | | | L _{WA} | | | |
| Annual energy consumption | | | | Q _{HE} | | | |
| Rated air flow rate, outdoors | | | | - | | | |
| Rated air flow rate, outdoors | | | | 2500 | | | |
| Rated air flow rate, outdoors | | | | m ³ /h | | | |

| | | | | | | | |
|---------------------------------|--|--|--|-------------------|--|--|--|
| Other items | | | | | | | |
| Declared load profile | | | | L | | | |
| Daily electricity consumption | | | | Q _{elec} | | | |
| Annual electricity consumption | | | | AEC | | | |
| Water heating energy efficiency | | | | η_{wh} | | | |
| Water heating energy efficiency | | | | 147 | | | |
| Water heating energy efficiency | | | | % | | | |

Contact details
 MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier:

Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND



· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST17D-****D |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | yes |
| Heat pump combination heater: | | yes |
| Parameters for | | low-temperature application. |
| Parameters for | | average climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|------------------|-------|------|--|-----------------|-------|------|
| Rated heat output (*) | Prated | 6.1 | kW | Seasonal space heating energy efficiency | η_s | 175 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | 5.4 | kW | Tj = - 7 °C | COPd | 2.78 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = + 2 °C | COPd | 4.43 | - |
| Tj = + 2 °C | Pdh | 4.1 | kW | Tj = + 7 °C | COPd | 6.27 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = +12 °C | COPd | 7.11 | - |
| Tj = + 7 °C | Pdh | 3.4 | kW | Tj = bivalent temperature | COPd | 2.26 | - |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Tj = operation limit temperature (***) | COPd | 2.26 | - |
| Tj = +12 °C | Pdh | 3.7 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = bivalent temperature | Pdh | 6.1 | kW | Supplementary heater | | | |
| Tj = operation limit temperature (***) | Pdh | 6.1 | kW | Rated heat output (*) | Psup | 0.0 | kW |
| Bivalent temperature | Tbiv | -10 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | -10 | °C | Power consumption in modes other than active mode | | | |
| Power consumption in modes other than active mode | | | | Off mode | | | |
| Off mode | P _{OFF} | 0.015 | kW | Thermostat-off mode | P _{TO} | 0.015 | kW |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Standby mode | P _{SB} | 0.015 | kW |
| Standby mode | P _{SB} | 0.015 | kW | Crankcase heater mode | P _{CK} | 0.000 | kW |
| Crankcase heater mode | P _{CK} | 0.000 | kW | Other items | | | |
| Capacity control | | | | Rated air flow rate, outdoors | | | |
| variable | | | | - | | | |
| Sound power level, indoors/outdoors | | | | 2500 | | | |
| L _{WA} | | | | m ³ /h | | | |
| 41 / 60 | | | | | | | |
| Annual energy consumption | | | | | | | |
| Q _{HE} | | | | | | | |
| 2838 | | | | | | | |
| kWh | | | | | | | |

| | | | | | | | |
|-----------------------------------|-------|-------|-----|---------------------------------|-------------|-----|---|
| For heat pump combination heater: | | | | | | | |
| Declared load profile | L | | | Water heating energy efficiency | η_{wh} | 147 | % |
| Daily electricity consumption | Qelec | 3.330 | kWh | | | | |
| Annual electricity consumption | AEC | 734 | kWh | | | | |

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier;

The signature is signed in the average climate / medium-temperature section.

Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|---------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST17D-****D |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | yes |
| Heat pump combination heater: | | yes |
| Parameters for | | medium-temperature application. |
| Parameters for | | colder climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|-------------------|---------|-------|--|------------|-------------------|------|
| Rated heat output (*) | Prated | 5.5 | kW | Seasonal space heating energy efficiency | η_s | 100 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | 3.4 | kW | Tj = - 7 °C | COPd | 2.17 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = + 2 °C | COPd | 3.31 | - |
| Tj = + 2 °C | Pdh | 3.4 | kW | Tj = + 7 °C | COPd | 5.15 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = +12 °C | COPd | 6.27 | - |
| Tj = + 7 °C | Pdh | 3.3 | kW | Tj = bivalent temperature | COPd | 1.15 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = operation limit temperature (***) | COPd | 1.08 | - |
| Tj = +12 °C | Pdh | 3.6 | kW | Tj = - 15 °C (if TOL < - 20 °C) | COPd | 1.15 | - |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Operation limit temperature | TOL | -25 | °C |
| Tj = bivalent temperature | Pdh | 4.5 | kW | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = operation limit temperature (***) | Pdh | 4.0 | kW | Supplementary heater | | | |
| Tj = - 15 °C (if TOL < - 20 °C) | Pdh | 4.5 | kW | Rated heat output (*) | Psup | 5.5 | kW |
| Bivalent temperature | Tbiv | -15 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | -22 | °C | Power consumption in modes other than active mode | | | |
| Off mode | | | | P _{OFF} | | | |
| Thermostat-off mode | | | | P _{TO} | | | |
| Standby mode | | | | P _{SB} | | | |
| Crankcase heater mode | | | | P _{CK} | | | |
| Other items | | | | Rated air flow rate, outdoors | | | |
| Capacity control | variable | | | - | 2500 | m ³ /h | |
| Sound power level, indoors/outdoors | L _{WA} | 41 / 60 | dB(A) | | | | |
| Annual energy consumption | Q _{HE} | 5265 | kWh | | | | |
| For heat pump combination heater: | | | | Water heating energy efficiency | | | |
| Declared load profile | L | | | η_{wh} | 121 | % | |
| Daily electricity consumption | Q _{elec} | 4.020 | kWh | | | | |
| Annual electricity consumption | AEC | 884 | kWh | | | | |

| | | | | | | | |
|--|--|--|--|---|--|--|--|
| Contact details | | | | | | | |
| MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. | | | | 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand | | | |
| The identification and signature of the person empowered to bind the supplier; | | | | | | | |
| The signature is signed in the average climate / medium-temperature section. | | | | Tadashi SAITO Manager, Quality Assurance Department THAILAND | | | |

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST17D-****D |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | yes |
| Heat pump combination heater: | | yes |
| Parameters for | | low-temperature application. |
| Parameters for | | colder climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|------------------|---------|-------|--|------------|-------------------|------|
| Rated heat output (*) | Prated | 5.5 | kW | Seasonal space heating energy efficiency | η_s | 147 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | 3.4 | kW | Tj = - 7 °C | COPd | 3.31 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = + 2 °C | COPd | 4.56 | - |
| Tj = + 2 °C | Pdh | 3.6 | kW | Tj = + 7 °C | COPd | 6.55 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = +12 °C | COPd | 7.33 | - |
| Tj = + 7 °C | Pdh | 3.4 | kW | Tj = bivalent temperature | COPd | 1.92 | - |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Tj = operation limit temperature (***) | COPd | 1.71 | - |
| Tj = +12 °C | Pdh | 3.7 | kW | Tj = - 15 °C (if TOL < - 20 °C) | COPd | 1.92 | - |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Operation limit temperature | TOL | -25 | °C |
| Tj = bivalent temperature | Pdh | 4.5 | kW | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = operation limit temperature (***) | Pdh | 5.5 | kW | | | | |
| Tj = - 15 °C (if TOL < - 20 °C) | Pdh | 4.5 | kW | Supplementary heater | | | |
| Bivalent temperature | Tbiv | -15 | °C | Rated heat output (*) | Psup | 0.0 | kW |
| Reference design conditions for space heating | Tdesignh | -22 | °C | Type of energy input | Electrical | | |
| Power consumption in modes other than active mode | | | | Supplementary heater | | | |
| Off mode | P _{OFF} | 0.015 | kW | | | | |
| Thermostat-off mode | P _{TO} | 0.015 | kW | | | | |
| Standby mode | P _{SB} | 0.015 | kW | | | | |
| Crankcase heater mode | P _{CK} | 0.000 | kW | | | | |
| Other items | | | | Rated air flow rate, outdoors | | | |
| Capacity control | variable | | | - | 2500 | m ³ /h | |
| Sound power level, indoors/outdoors | L _{WA} | 41 / 60 | dB(A) | | | | |
| Annual energy consumption | Q _{HE} | 3616 | kWh | | | | |

| | | | | | | | |
|-----------------------------------|-------------------|-------|-----|---------------------------------|-----|---|--|
| For heat pump combination heater: | | | | Water heating energy efficiency | | | |
| Declared load profile | L | | | η_{wh} | 121 | % | |
| Daily electricity consumption | Q _{elec} | 4.020 | kWh | | | | |
| Annual electricity consumption | AEC | 884 | kWh | | | | |

Contact details
 MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier;
 Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|---------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST17D-****D |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | yes |
| Heat pump combination heater: | | yes |
| Parameters for | | medium-temperature application. |
| Parameters for | | warmer climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|------------------|-------|------|--|-----------------|---------|-------------------|
| Rated heat output (*) | Prated | 6.0 | kW | Seasonal space heating energy efficiency | η_s | 167 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | - | kW | Tj = - 7 °C | COPd | - | - |
| Degradation co-efficient (**) | Cdh | - | - | Tj = + 2 °C | COPd | 2.47 | - |
| Tj = + 2 °C | Pdh | 6.0 | kW | Tj = + 7 °C | COPd | 3.95 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = +12 °C | COPd | 5.50 | - |
| Tj = + 7 °C | Pdh | 3.9 | kW | Tj = bivalent temperature | COPd | 2.51 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = operation limit temperature (***) | COPd | 2.51 | - |
| Tj = +12 °C | Pdh | 3.6 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = bivalent temperature | Pdh | 6.0 | kW | Supplementary heater | | | |
| Tj = operation limit temperature (***) | Pdh | 6.0 | kW | Rated heat output (*) | Psup | 0.0 | kW |
| Bivalent temperature | Tbiv | 2 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | 2 | °C | Other items | | | |
| Power consumption in modes other than active mode | | | | Rated air flow rate, outdoors | | | |
| Off mode | P _{OFF} | 0.015 | kW | | | 2500 | m ³ /h |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Capacity control | variable | | |
| Standby mode | P _{SB} | 0.015 | kW | Sound power level, indoors/outdoors | L _{WA} | 41 / 60 | dB(A) |
| Crankcase heater mode | P _{CK} | 0.000 | kW | Annual energy consumption | Q _{HE} | 1884 | kWh |

| | | | | | | | |
|-----------------------------------|-------|-------|-----|---------------------------------|-----|---|--|
| For heat pump combination heater: | | | | Water heating energy efficiency | | | |
| Declared load profile | L | | | η_{wh} | 167 | % | |
| Daily electricity consumption | Qelec | 2.940 | kWh | | | | |
| Annual electricity consumption | AEC | 647 | kWh | | | | |

Contact details
 MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier;
 Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST17D-****D |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | yes |
| Heat pump combination heater: | | yes |
| Parameters for | | low-temperature application. |
| Parameters for | | warmer climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|------------------|-------|------|--|-----------------|-------|------|
| Rated heat output (*) | Prated | 6.0 | kW | Seasonal space heating energy efficiency | η_s | 230 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | - | kW | Tj = - 7 °C | COPd | - | - |
| Degradation co-efficient (**) | Cdh | - | - | Tj = + 2 °C | COPd | 3.67 | - |
| Tj = + 2 °C | Pdh | 6.0 | kW | Tj = + 7 °C | COPd | 5.92 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = +12 °C | COPd | 7.10 | - |
| Tj = + 7 °C | Pdh | 3.9 | kW | Tj = bivalent temperature | COPd | 3.67 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = operation limit temperature (***) | COPd | 3.67 | - |
| Tj = +12 °C | Pdh | 3.7 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = bivalent temperature | Pdh | 6.0 | kW | Supplementary heater | | | |
| Tj = operation limit temperature (***) | Pdh | 6.0 | kW | Rated heat output (*) | Psup | 0.0 | kW |
| Bivalent temperature | Tbiv | 2 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | 2 | °C | Power consumption in modes other than active mode | | | |
| Power consumption in modes other than active mode | | | | Off mode | | | |
| Off mode | P _{OFF} | 0.015 | kW | Thermostat-off mode | P _{TO} | 0.015 | kW |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Standby mode | P _{SB} | 0.015 | kW |
| Standby mode | P _{SB} | 0.015 | kW | Crankcase heater mode | P _{CK} | 0.000 | kW |
| Crankcase heater mode | P _{CK} | 0.000 | kW | Other items | | | |
| Capacity control | | | | Rated air flow rate, outdoors | | | |
| variable | | | | - | | | |
| Sound power level, indoors/outdoors | | | | 2500 | | | |
| L _{WA} | | | | m ³ /h | | | |
| 41 / 60 | | | | | | | |
| Annual energy consumption | | | | | | | |
| Q _{HE} | | | | | | | |
| 1378 | | | | | | | |
| kWh | | | | | | | |
| For heat pump combination heater: | | | | Declared load profile | | | |
| L | | | | Water heating energy efficiency | | | |
| | | | | η_{wh} | | | |
| Daily electricity consumption | | | | 167 | | | |
| Q _{elec} | | | | % | | | |
| 2.940 | | | | | | | |
| Annual electricity consumption | | | | | | | |
| AEC | | | | | | | |
| 647 | | | | | | | |
| kWh | | | | | | | |

| | | | | | | | |
|--|--|--|--|---|--|--|--|
| Contact details | | | | | | | |
| MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. | | | | 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand | | | |
| The identification and signature of the person empowered to bind the supplier; | | | | | | | |
| The signature is signed in the average climate / medium-temperature section. | | | | Tadashi SAITO | | | |
| | | | | Manager, Quality Assurance Department | | | |
| | | | | THAILAND | | | |

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|---------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-MED |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | no |
| Heat pump combination heater: | | yes |
| Parameters for | | medium-temperature application. |
| Parameters for | | average climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|------------------|-------|------|--|------------|-------|-------------------|
| Rated heat output (*) | Prated | 6.0 | kW | Seasonal space heating energy efficiency | η_s | 126 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | 5.3 | kW | Tj = - 7 °C | COPd | 1.85 | - |
| Degradation co-efficient (**) | Cdh | 1.00 | - | Tj = + 2 °C | COPd | 3.13 | - |
| Tj = + 2 °C | Pdh | 3.7 | kW | Tj = + 7 °C | COPd | 4.66 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = +12 °C | COPd | 6.53 | - |
| Tj = + 7 °C | Pdh | 3.1 | kW | Tj = bivalent temperature | COPd | 1.85 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = operation limit temperature (***) | COPd | 1.64 | - |
| Tj = +12 °C | Pdh | 3.9 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = bivalent temperature | Pdh | 5.3 | kW | Supplementary heater | | | |
| Tj = operation limit temperature (***) | Pdh | 5.8 | kW | Rated heat output (*) | Psup | 0.2 | kW |
| Bivalent temperature | Tbiv | -7 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | -10 | °C | Other items | | | |
| Power consumption in modes other than active mode | | | | Rated air flow rate, outdoors | | | |
| Off mode | P _{OFF} | 0.015 | kW | | | 2500 | m ³ /h |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Capacity control | | | |
| Standby mode | P _{SB} | 0.015 | kW | variable | | | |
| Crankcase heater mode | P _{CK} | 0.000 | kW | Sound power level, indoors/outdoors | | | |
| | | | | L _{WA} | | | |
| | | | | 41 / 60 | | | |
| | | | | Annual energy consumption | | | |
| | | | | Q _{HE} | | | |
| | | | | 3850 | | | |
| | | | | kWh | | | |

| | | | | | | | |
|-----------------------------------|-------|-------|-----|---------------------------------|-------------|-----|---|
| For heat pump combination heater: | | | | | | | |
| Declared load profile | L | | | Water heating energy efficiency | η_{wh} | 152 | % |
| Daily electricity consumption | Qelec | 3.210 | kWh | | | | |
| Annual electricity consumption | AEC | 707 | kWh | | | | |

Contact details
 MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier:



Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND

- Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
- Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
- (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
- (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
- (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-MED |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | no |
| Heat pump combination heater: | | yes |
| Parameters for | | low-temperature application. |
| Parameters for | | average climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|-----------------|---------|-------|--|------------|-------------------|------|
| Rated heat output (*) | Prated | 6.1 | kW | Seasonal space heating energy efficiency | η_s | 175 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | 5.4 | kW | Tj = - 7 °C | COPd | 2.78 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = + 2 °C | COPd | 4.43 | - |
| Tj = + 2 °C | Pdh | 4.1 | kW | Tj = + 7 °C | COPd | 6.27 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = +12 °C | COPd | 7.11 | - |
| Tj = + 7 °C | Pdh | 3.4 | kW | Tj = bivalent temperature | COPd | 2.26 | - |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Tj = operation limit temperature (***) | COPd | 2.26 | - |
| Tj = +12 °C | Pdh | 3.7 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = bivalent temperature | Pdh | 6.1 | kW | Supplementary heater | | | |
| Tj = operation limit temperature (***) | Pdh | 6.1 | kW | Rated heat output (*) | Psup | 0.0 | kW |
| Bivalent temperature | Tbiv | -10 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | -10 | °C | Power consumption in modes other than active mode | | | |
| Off mode | | | | P _{OFF} | | | |
| Thermostat-off mode | | | | P _{TO} | | | |
| Standby mode | | | | P _{SB} | | | |
| Crankcase heater mode | | | | P _{CK} | | | |
| Other items | | | | Rated air flow rate, outdoors | | | |
| Capacity control | variable | | | - | 2500 | m ³ /h | |
| Sound power level, indoors/outdoors | L _{WA} | 41 / 60 | dB(A) | | | | |
| Annual energy consumption | Q _{HE} | 2838 | kWh | | | | |

| | | | | | | | |
|-----------------------------------|-------------------|-------|-----|---------------------------------|-------------|-----|---|
| For heat pump combination heater: | | | | | | | |
| Declared load profile | L | | | Water heating energy efficiency | η_{wh} | 152 | % |
| Daily electricity consumption | Q _{elec} | 3.210 | kWh | | | | |
| Annual electricity consumption | AEC | 707 | kWh | | | | |

Contact details
 MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier;
 Tadashi SAITO
 Manager, Quality Assurance Department
 THAILAND

The signature is signed in the average climate / medium-temperature section.

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|---------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-MED |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | no |
| Heat pump combination heater: | | yes |
| Parameters for | | medium-temperature application. |
| Parameters for | | colder climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|-------------------|---------|-------|--|------------|-------------------|------|
| Rated heat output (*) | Prated | 5.5 | kW | Seasonal space heating energy efficiency | η_s | 100 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | 3.4 | kW | Tj = - 7 °C | COPd | 2.17 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = + 2 °C | COPd | 3.31 | - |
| Tj = + 2 °C | Pdh | 3.4 | kW | Tj = + 7 °C | COPd | 5.15 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = +12 °C | COPd | 6.27 | - |
| Tj = + 7 °C | Pdh | 3.3 | kW | Tj = bivalent temperature | COPd | 1.15 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = operation limit temperature (***) | COPd | 1.08 | - |
| Tj = +12 °C | Pdh | 3.6 | kW | Tj = - 15 °C (if TOL < - 20 °C) | COPd | 1.15 | - |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Operation limit temperature | TOL | -25 | °C |
| Tj = bivalent temperature | Pdh | 4.5 | kW | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = operation limit temperature (***) | Pdh | 4.0 | kW | Supplementary heater | | | |
| Tj = - 15 °C (if TOL < - 20 °C) | Pdh | 4.5 | kW | Rated heat output (*) | Psup | 5.5 | kW |
| Bivalent temperature | Tbiv | -15 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | -22 | °C | Power consumption in modes other than active mode | | | |
| Off mode | | | | P _{OFF} | | | |
| Thermostat-off mode | | | | P _{TO} | | | |
| Standby mode | | | | P _{SB} | | | |
| Crankcase heater mode | | | | P _{CK} | | | |
| Other items | | | | Rated air flow rate, outdoors | | | |
| Capacity control | variable | | | - | 2500 | m ³ /h | |
| Sound power level, indoors/outdoors | L _{WA} | 41 / 60 | dB(A) | | | | |
| Annual energy consumption | Q _{HE} | 5265 | kWh | | | | |
| For heat pump combination heater: | | | | Water heating energy efficiency | | | |
| Declared load profile | L | | | η_{wh} | 132 | % | |
| Daily electricity consumption | Q _{elec} | 3.690 | kWh | | | | |
| Annual electricity consumption | AEC | 811 | kWh | | | | |

| | | | | | | | |
|--|--|--|--|---|--|--|--|
| Contact details | | | | | | | |
| MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. | | | | 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand | | | |
| The identification and signature of the person empowered to bind the supplier; | | | | | | | |
| The signature is signed in the average climate / medium-temperature section. | | | | Tadashi SAITO Manager, Quality Assurance Department THAILAND | | | |

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-MED |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | no |
| Heat pump combination heater: | | yes |
| Parameters for | | low-temperature application. |
| Parameters for | | colder climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|-------------------|---------|-------|--|------------------|-------|-------------------|
| Rated heat output (*) | Prated | 5.5 | kW | Seasonal space heating energy efficiency | η_s | 147 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | 3.4 | kW | Tj = - 7 °C | COPd | 3.31 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = + 2 °C | COPd | 4.56 | - |
| Tj = + 2 °C | Pdh | 3.6 | kW | Tj = + 7 °C | COPd | 6.55 | - |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Tj = +12 °C | COPd | 7.33 | - |
| Tj = + 7 °C | Pdh | 3.4 | kW | Tj = bivalent temperature | COPd | 1.92 | - |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Tj = operation limit temperature (***) | COPd | 1.71 | - |
| Tj = +12 °C | Pdh | 3.7 | kW | Tj = - 15 °C (if TOL < - 20 °C) | COPd | 1.92 | - |
| Degradation co-efficient (**) | Cdh | 0.97 | - | Operation limit temperature | TOL | -25 | °C |
| Tj = bivalent temperature | Pdh | 4.5 | kW | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = operation limit temperature (***) | Pdh | 5.5 | kW | | | | |
| Tj = - 15 °C (if TOL < - 20 °C) | Pdh | 4.5 | kW | | | | |
| Bivalent temperature | Tbiv | -15 | °C | | | | |
| Reference design conditions for space heating | Tdesignh | -22 | °C | | | | |
| Power consumption in modes other than active mode | | | | Supplementary heater | | | |
| Off mode | P _{OFF} | 0.015 | kW | Rated heat output (*) | P _{sup} | 0.0 | kW |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Type of energy input | Electrical | | |
| Standby mode | P _{SB} | 0.015 | kW | | | | |
| Crankcase heater mode | P _{CK} | 0.000 | kW | | | | |
| Other items | | | | Rated air flow rate, outdoors | | | |
| Capacity control | variable | | | | | 2500 | m ³ /h |
| Sound power level, indoors/outdoors | L _{WA} | 41 / 60 | dB(A) | | | | |
| Annual energy consumption | Q _{HE} | 3616 | kWh | | | | |
| For heat pump combination heater: | | | | Water heating energy efficiency | | | |
| Declared load profile | L | | | | η_{wh} | 132 | % |
| Daily electricity consumption | Q _{elec} | 3.690 | kWh | | | | |
| Annual electricity consumption | AEC | 811 | kWh | | | | |

| | | | | | | | |
|--|--|--|--|---|--|--|--|
| Contact details | | | | | | | |
| MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. | | | | 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand | | | |
| The identification and signature of the person empowered to bind the supplier; | | | | | | | |
| The signature is signed in the average climate / medium-temperature section. | | | | Tadashi SAITO Manager, Quality Assurance Department THAILAND | | | |

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|---------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-MED |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | no |
| Heat pump combination heater: | | yes |
| Parameters for | | medium-temperature application. |
| Parameters for | | warmer climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|------------------|-------|------|--|-----------------|-------|------|
| Rated heat output (*) | Prated | 6.0 | kW | Seasonal space heating energy efficiency | η_s | 167 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj | | | |
| Tj = - 7 °C | Pdh | - | kW | Tj = - 7 °C | COPd | - | - |
| Degradation co-efficient (**) | Cdh | - | - | Tj = + 2 °C | COPd | 2.47 | - |
| Tj = + 2 °C | Pdh | 6.0 | kW | Tj = + 7 °C | COPd | 3.95 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = +12 °C | COPd | 5.50 | - |
| Tj = + 7 °C | Pdh | 3.9 | kW | Tj = bivalent temperature | COPd | 2.51 | - |
| Degradation co-efficient (**) | Cdh | 0.99 | - | Tj = operation limit temperature (***) | COPd | 2.51 | - |
| Tj = +12 °C | Pdh | 3.6 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | Cdh | 0.98 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| Tj = bivalent temperature | Pdh | 6.0 | kW | Supplementary heater | | | |
| Tj = operation limit temperature (***) | Pdh | 6.0 | kW | Rated heat output (*) | Psup | 0.0 | kW |
| Bivalent temperature | Tbiv | 2 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | Tdesignh | 2 | °C | Power consumption in modes other than active mode | | | |
| Power consumption in modes other than active mode | | | | Off mode | | | |
| Off mode | P _{OFF} | 0.015 | kW | Thermostat-off mode | P _{TO} | 0.015 | kW |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Standby mode | P _{SB} | 0.015 | kW |
| Standby mode | P _{SB} | 0.015 | kW | Crankcase heater mode | P _{CK} | 0.000 | kW |
| Crankcase heater mode | P _{CK} | 0.000 | kW | Other items | | | |
| Capacity control | | | | Rated air flow rate, outdoors | | | |
| variable | | | | - | | | |
| Sound power level, indoors/outdoors | | | | 2500 | | | |
| L _{WA} | | | | m ³ /h | | | |
| 41 / 60 | | | | | | | |
| Annual energy consumption | | | | | | | |
| Q _{HE} | | | | | | | |
| 1884 | | | | | | | |
| kWh | | | | | | | |
| For heat pump combination heater: | | | | Declared load profile | | | |
| L | | | | Water heating energy efficiency | | | |
| | | | | η_{wh} | | | |
| Daily electricity consumption | | | | 159 | | | |
| Q _{elec} | | | | % | | | |
| 3.070 | | | | | | | |
| Annual electricity consumption | | | | | | | |
| AEC | | | | | | | |
| 676 | | | | | | | |
| kWh | | | | | | | |

Contact details

MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD.

700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand

The identification and signature of the person empowered to bind the supplier;

Tadashi SAITO

The signature is signed in the average climate / medium-temperature section.

Manager, Quality Assurance Department

THAILAND

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

| | | |
|---------------------------------------|---------------|------------------------------|
| Model(s): | Outdoor unit: | SUZ-SHWM60VAH(-SC) |
| | Indoor unit: | EHST20D-MED |
| Air-to-water heat pump: | | yes |
| Water-to-water heat pump: | | no |
| Brine-to-water heat pump: | | no |
| Low-temperature heat pump: | | no |
| Equipped with a supplementary heater: | | no |
| Heat pump combination heater: | | yes |
| Parameters for | | low-temperature application. |
| Parameters for | | warmer climate conditions. |

| Item | Symbol | Value | Unit | Item | Symbol | Value | Unit |
|--|----------------------|-------|------|--|------------------|-------|------|
| Rated heat output (*) | Prated | 6.0 | kW | Seasonal space heating energy efficiency | η_s | 230 | % |
| Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j | | | | Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j | | | |
| T _j = - 7 °C | P _{dh} | - | kW | T _j = - 7 °C | COP _d | - | - |
| Degradation co-efficient (**) | C _{dh} | - | - | T _j = + 2 °C | COP _d | 3.67 | - |
| T _j = + 2 °C | P _{dh} | 6.0 | kW | T _j = + 7 °C | COP _d | 5.92 | - |
| Degradation co-efficient (**) | C _{dh} | 0.99 | - | T _j = +12 °C | COP _d | 7.10 | - |
| T _j = + 7 °C | P _{dh} | 3.9 | kW | T _j = bivalent temperature | COP _d | 3.67 | - |
| Degradation co-efficient (**) | C _{dh} | 0.98 | - | T _j = operation limit temperature (***) | COP _d | 3.67 | - |
| T _j = +12 °C | P _{dh} | 3.7 | kW | Operation limit temperature | TOL | -25 | °C |
| Degradation co-efficient (**) | C _{dh} | 0.97 | - | Heating water operating limit temperature | WTOL | 60 | °C |
| T _j = bivalent temperature | P _{dh} | 6.0 | kW | Supplementary heater | | | |
| T _j = operation limit temperature (***) | P _{dh} | 6.0 | kW | Rated heat output (*) | P _{sup} | 0.0 | kW |
| Bivalent temperature | T _{biv} | 2 | °C | Type of energy input | Electrical | | |
| Reference design conditions for space heating | T _{designh} | 2 | °C | Power consumption in modes other than active mode | | | |
| Power consumption in modes other than active mode | | | | Off mode | | | |
| Off mode | P _{OFF} | 0.015 | kW | Thermostat-off mode | P _{TO} | 0.015 | kW |
| Thermostat-off mode | P _{TO} | 0.015 | kW | Standby mode | P _{SB} | 0.015 | kW |
| Standby mode | P _{SB} | 0.015 | kW | Crankcase heater mode | P _{CK} | 0.000 | kW |
| Crankcase heater mode | P _{CK} | 0.000 | kW | Other items | | | |
| Capacity control | | | | Rated air flow rate, outdoors | | | |
| variable | | | | - | | | |
| Sound power level, indoors/outdoors | | | | 2500 | | | |
| L _{WA} | | | | m ³ /h | | | |
| 41 / 60 | | | | | | | |
| Annual energy consumption | | | | | | | |
| Q _{HE} | | | | | | | |
| 1378 | | | | | | | |
| kWh | | | | | | | |
| For heat pump combination heater: | | | | Declared load profile | | | |
| L | | | | Water heating energy efficiency | | | |
| Daily electricity consumption | | | | η_{wh} | | | |
| Q _{elec} | | | | 159 | | | |
| 3.070 | | | | % | | | |
| Annual electricity consumption | | | | | | | |
| AEC | | | | | | | |
| 676 | | | | | | | |
| kWh | | | | | | | |

| | | | | | | | |
|--|--|--|--|---|--|--|--|
| Contact details | | | | | | | |
| MITSUBISHI ELECTRIC CONSUMER PRODUCTS (THAILAND) CO., LTD. | | | | 700/406 moo 7, Tambon don hua roh, Amphur muang, chonburi 20000, Thailand | | | |
| The identification and signature of the person empowered to bind the supplier; | | | | | | | |
| The signature is signed in the average climate / medium-temperature section. | | | | Tadashi SAITO Manager, Quality Assurance Department THAILAND | | | |

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

This information is based on EU regulation No 811/2013 and No 813/2013.